

4G PT CAMERA

HX-SD30L3-4GW



















Product Feature

- 3MP HD Capture smooth videos and clear images with 3MP High Definition Bullet Cameras.
- Hassle-free operation No configuration required. Insert the SIM card and turn on the power to use it immediately. Video playback is supported.
- 4G Card Traffic Information Management Clearly know the operator, signal Intensity, and traffic status information.
- Theft-Proof Storage Enjoy theft-proof cloud storage. Ensure the safety of your video data. Local TF card video storage is also supported for easy access
- Two-Way Audio Stay connected always! The built-in mic and speaker enable easy, disturbance-free communication between the camera and phone.
- Active defense Get instant audio alarms and light alerts when there is an intrusion in the restricted area.
- Supports Remote Monitoring Stay connected from anywhere, anytime. Supports remote monitoring by PC, Tablet, and mobile.
- IP66 Ingress Protection Comes with protection against powerful water jets and dust particles.













4G Connect

Hixecure camera does not even need to be installed; all you need to do is mount it plug it in, connect to the 4G network, and you are ready to go.



Supports all Indian 4G sim cards:







Pan & Tilt



3MP Full HD Video Recording

Designed to reflect an improved picture quality in Full HD video, preventing pixilation in the video feed and allowing for a clear view of every detail.





Coloured Night View

Provides perfect clarity full-color video even in low light because the larger sensor's pixels collect more light, which enhances image quality even in low light.

Motion Detection


Camera recognises human detection and intelligent notifications, so you will only receive a warning when it is necessary. If there is enough variation between frames, a camera will turn on automatically.



MicroSD Card Support

Use a MicroSd Card to record your video; it can support up to 256GB of data.



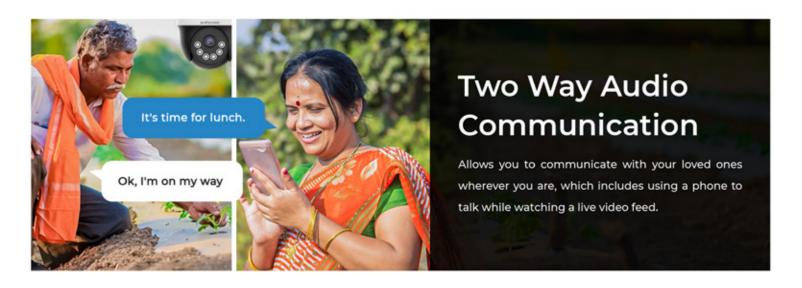

Applications











Specification

Resolution 3MP

Sensor 1/3" CMOS Sensor

Shutter Shutter adaptation

Lens 4mm

Rotation Angle Pan: 200/S ; Tilt :1050

Day-night mode Infrared filter

DNR 3D digital noise reduction

Dynamic Range Digital WDR

IR Distance IR 20-30m, spotlight 15-20m (depends on environment)

Compression Standard

Video Compression H.265/H.264

Video Compression HD/SD, Rate adaptation

Audio Coding Fonnat MC/G711A

Image

Resolution Main stream: 2304 *1296, Sub stream: 640x360

Frame Rate Max 15fps, framerate self-adaption

Image reversal Support horizontal and vertical reversal

Privacy Masking Support

Network Protocol

Protocol N1 Protocol (Private protocol)

Alarm Function

Intelligent Alarm Motion detection

Alann Notbfication Alarm otification push



Storage

Interface Micro SD card (max 256G)

Cloud Storage Not Support

Wireless Spec

Wireless Standard 4G:LTE-TDD/LTE FDD;

Wirelessl Frequency Band 4G-LTE;B1/B3/B5/B8;TDD-LTE:B34/B38/B39/B40/B41; WCDMA:B1/B5/B8

Wifi Support

Working Temperature -20°C-50°C, Working Humidity: <95%(no condensation)

Power Adapter DC 12V IA

Waterproof IP66