

3MP + 3MP 4G Solar PT Camera

HX-SD30T30L3-SLR-4G



Solar Power



4G Connect



Full Color Night Vision



Motion Detection



Pan & Tilt

P2P

Plug & Play Technology



2 Way Audio



Siren



SD Card Storage



Outdoor IP66

Product Feature

- Solar power supply, built-in lithium battery, 4G connection
- 100% completely wire free;
- Working and standby ultra-low power consumption, ultra-long standby.
- Smart linkage camera;
- 3MP+3MP, HD image;
Horizontal rotation 0-350 degrees,
Vertical rotation 0-90 degrees.
- Support full color mode, clear images at night;
- Built-in MIC and speaker, two-way audio
- Intelligent detection: Automatically recover when an abnormality occurs in the equipment to ensure the normal use of the equipment.

3MP + 3MP 4G Solar PT Camera

Smart Linkage Camera

When the top camera detects motion, the other rotates to focus on the area.



18650mAh
Battery



Solar
Panel



Built in MIC
& Speaker



Weather
Proof



4G Connect

Hixecure camera does not even need to be installed; all you need to do is mount it plug it in, connect to the 4G network, and you are ready to go.

Supports all Indian sim cards:



Pan & Tilt

It can pan up to 350°, tilt up to 90°, using a mobile app you can monitor and control rotation remotely.




3MP Full HD Video Recording

Designed to reflect an improved picture quality in Full HD video, preventing pixilation in the video feed and allowing for a clear view of every detail.



Coloured Night View

Provides perfect clarity full-color video even in low light because the larger sensor's pixels collect more light, which enhances image quality even in low light.

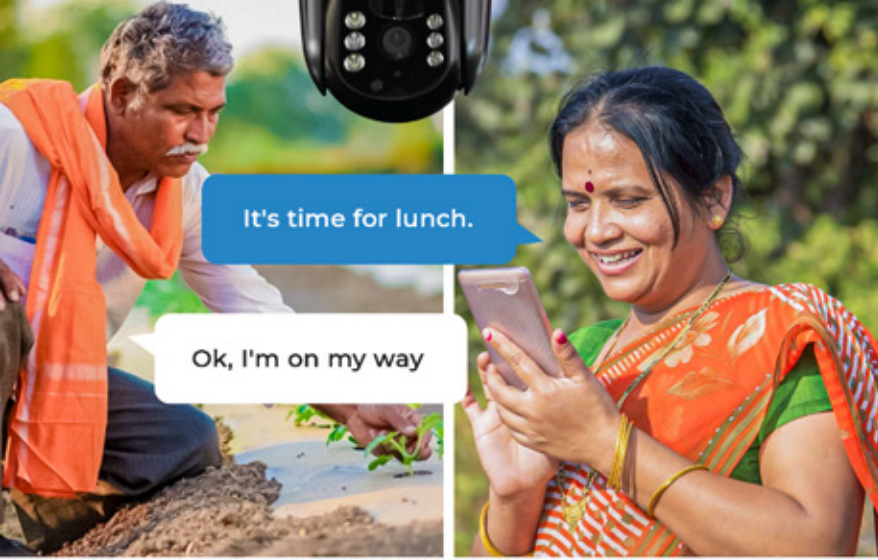

Two Way Audio Communication


Allows you to communicate with your loved ones wherever you are, which includes using a phone to talk while watching a live video feed.

MicroSD Card Support

Use a MicroSd Card to record your video; it can support up to 256GB of data.



Applications



Pond Area



Farm House



Construction Site



Agricultural Land

Specification

Camera

Pixel	3MP + 3MP
Image Sensor	1/2.9" CMOS Sensor
Shutter	Shutter adaptive
Day and night conversion mode	ICR infrared filter
Digital noise reduction	3D digital noise reduction
Dynamic Range	Digital Wide Dynamic
PIR range	10 meters distance, 120 degrees
Fill light distance	Infrared distance 30 meters

Video

Video compression standard	H.265/H.264
Stream	HD and SD
Maximum image size	2304X1296
Frame rate	15 frames/s
Image settings	Adaptive
BLC	Support

Audio

Audio encoding format	AAC/G711A
Two-way audio	Built-in microphone and speaker

Smart Features

4G Bands	FDD:B1/3/5/7/8/20 TDD:B38/40/41 GSM:900/1800MHz
Encryption	WEP, WPA, WPA2
Smart alarm	PIR+human shape, motion detection alarm
Alarm information	Alarm information push
Battery Type	Rechargeable lithium battery
Battery capacity	18650mAh

General

Indicator light	Red and green LED
Button	1 reset button
Storage interface	Micro SD card
Cloud storage	Not support
Wifi	Not support
Horizontal rotation range	0° ~350° Horizontal 0.1° ~20° /sec.
Vertical rotation range	0° 90° Vertical 0.1° -10° /sec;
Color 0.1 Lux	Black and white 0.01 Lux
Operating temperature and humidity	-20o~50oC, Humidity is less than 95% (no condensation)
Input power	Micro DC 5V/1A
Waterproof	IP66