



# 3MP Wi-Fi Dome Camera

HX-D30L3-W



3MP  
Camera



Wi-Fi  
Connection



Day & Night  
Mode



Two Way  
Audio



Motion  
Detection



Siren



SD Card  
Support



**RTMP**  
Real Time  
Messaging  
Protocol

## Product Feature

- 3MP HD – Capture smooth videos and clear images with 3MP High Definition Dome Cameras.
- Supports TF Card Video Storage – Continuous video recording is supported on the TF card. Supports up to 256 GB.
- Two-Way Audio – Capture the audio clearly. The built-in mic and speaker enable easy two-way communication between the phone and the camera.
- Intrusion Alert – Get instant intrusion alerts when there is a break-in in restricted areas.
- Customize The Intrusion Alarms – Get light and audio alarms when there is an intrusion. Customize the alarm as per your requirements.
- Supports Remote Monitoring – View the live status from anywhere, anytime. Monitor your space remotely by mobile, PC, and tablet.

# 3MP Dome Camera

Wireless



**RTMP** Real Time Messaging Protocol

Siren

Motion Detection

Built in MIC & Speaker

## 3MP Full HD Video Recording

Designed to reflect an improved picture quality in Full HD video, preventing pixilation in the video feed and allowing for a clear view of every detail.



Hixecure 4G Camera



Standard 720P Resolution

# Motion Detection

Camera recognises human detection and intelligent notifications, so you will only receive a warning when it is necessary. If there is enough variation between frames, a camera will turn on automatically.




# Day/NightMode

Color video is captured by the camera in conditions of normal lighting. In low light and complete darkness, the camera records black and white video



# MicroSD Card Support

Use a MicroSd Card to record your video; it can support up to 2560B of data.

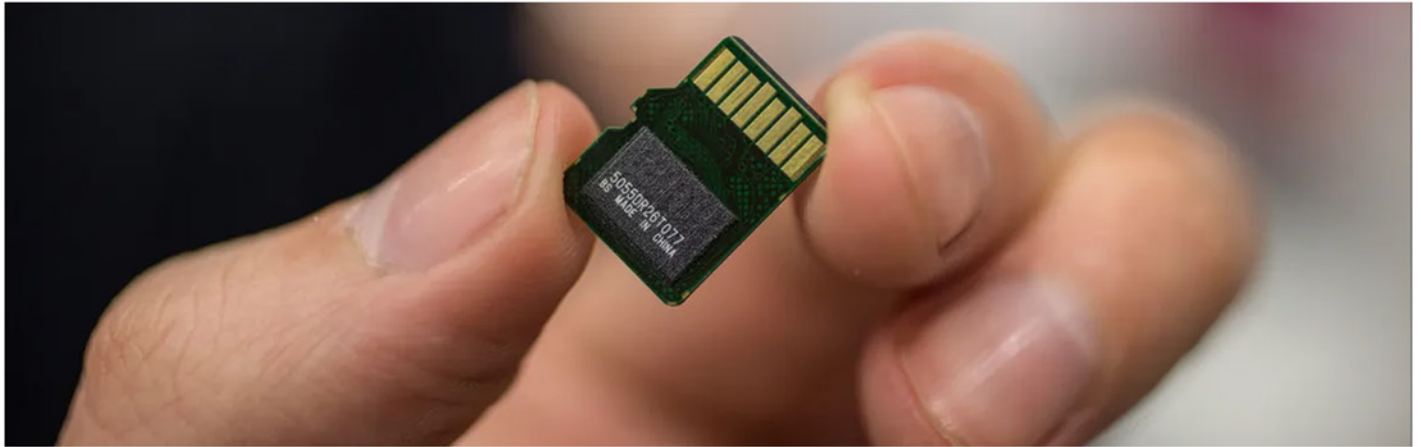

# Two Way Audio Communication

Allows you to communicate with your loved ones wherever you are, which includes using a phone to talk while watching a live video feed.



# Applications



# Specification

---

## Camera

Pixel	3MP
Image Sensor	1/3" CMOS Sensor
Shutter	Shutter adaptive
Day and night conversion mode	ICR infrared filter
Digital noise reduction	3D digital noise reduction
Dynamic Range	Digital Wide Dynamic
IR range	30 Meters

---

## Video

Video compression standard	H.265/H.264
Video compression rate	HD and SD two modes, bit rate adaptive
Maximum image size	2304X1296
Frame rate	15 frames/s
Image settings	Adaptive
BLC	Support

---

## Audio

Audio encoding format	AAC/G711A
Two-way audio	Built-in microphone and speaker

---

# Specification

---

## Smart Features

Encryption	WEP, WPA, WPA2
Smart alarm	Motion detection alarm
Alarm information	Alarm information push

---

## General

Image flip	Support horizontal and vertical flip
Privacy masking	Support
Storage interface	Micro SD card
Cloud storage	Not support
Wifi	Not support
Operating temperature and humidity	-200-500C, Humidity is less than 95% (no condensation)
Power supply	DC12V/1A
Onvif	Support

---