

SMART WIFI PT CAMERA

HX-R20L1-W



Product Feature

- 2MP, enjoy HD video.
- Using high-precision motor, two-way gimbal, Pan:352°, Tilt:58°
- Smart detection: Automatically recover when an abnormality is detected in the device to ensure the normal use of the device.
- Support cloud storage and TF card storage(Max 256G).
- Built-in high-sensitivity MIC and speaker, support two-way audio.
- Intelligent mobile tracking, automatically track when people break into the monitoring area.
- Regional motion detection, push alarm notification.
- Support remote monitoring on mobile phones and PC to view the live video anytime, anywhere.
- Smart humanoid detection, filtering false alarm, and accurately protecting your safety.



HIXECURE
technology tweaked, for better


2MP Smart Wifi Camera

Connect with wifi to have a hassle-free camera connection




Pan & Tilt

It can pan up to 352°, tilt up to 58°, using a mobile app you can monitor and control rotation remotely.

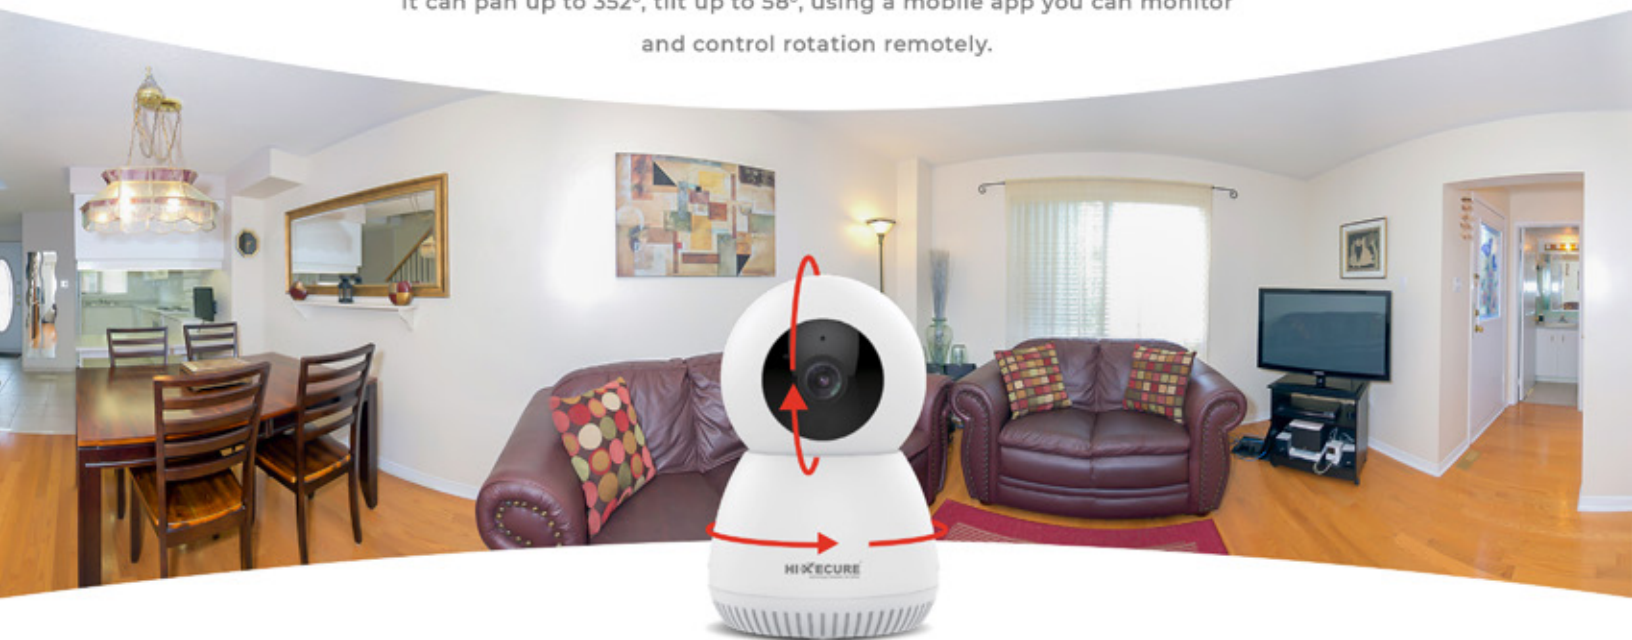


Day/Night Mode

Color video is captured by the camera in conditions of normal lighting. In low light and complete darkness, the camera records black and white video

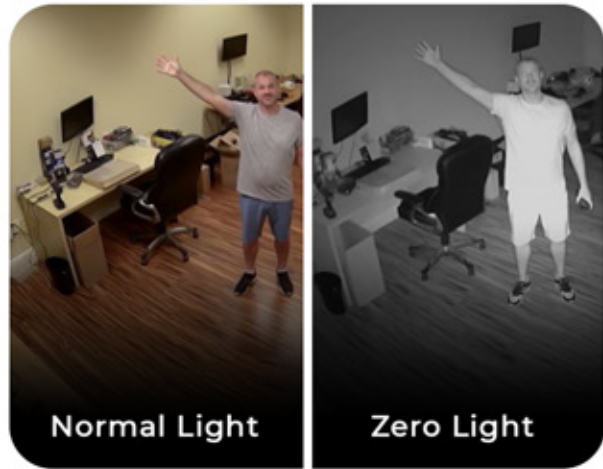

Normal Light

Zero Light

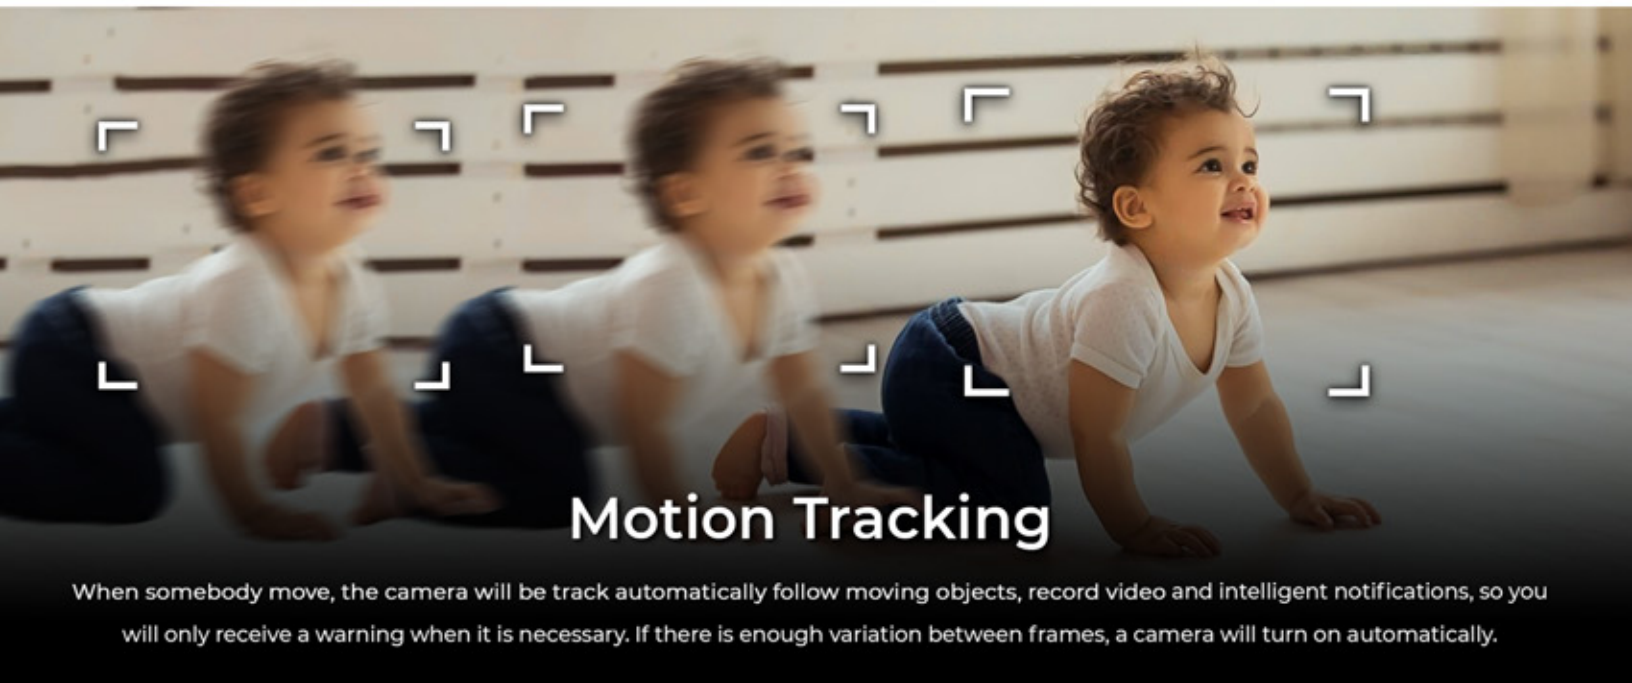

Motion Tracking

When somebody move, the camera will be track automatically follow moving objects, record video and intelligent notifications, so you will only receive a warning when it is necessary. If there is enough variation between frames, a camera will turn on automatically.




MicroSD Card Support


Use a MicroSd Card to record your video; it can support up to 2560B of data.

Two Way Audio Communication


Allows you to communicate with your loved ones wherever you are, which includes using a phone to talk while watching a live video feed.

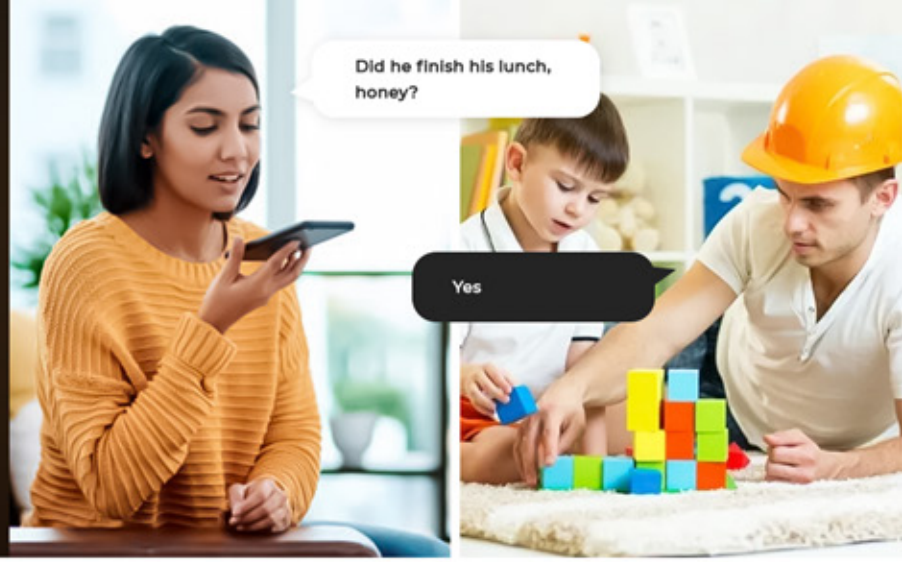


Applications



Home



Kiosk



Restaurant

Specification

Pixel	2MP
Sensor	1/3" CMOS Sensor
Lens	4mm fixed lens
Resolution	Main stream: 2304x1280;Sub stream: 640x360
Frame rate	15 fps
Compression format	H. 264/H.265,,Support dual stream
Audio format	AAC, G711
Storage	Support cloud storage / TF card storage (Max256G)
Audio function	Two-way audio
4G band	No
Bluetooth	NO
WIFI	Support
RJ45 ethernet Interface	NO
ONVIF & RTMP	NO
Protocol	Support NI protocol
Min. Illumination	Color: 0.1Lux, B/W 0.01 Lux
IR LED	6 R LEDs
LED distance	IR:10M(Varies by environment)
Power supply	DC 12V Micro USB port
Power dissipation	≤3W